



Dothan AL
800-264-8035
334-793-6367

Birmingham AL
800-553-5582
205-328-6313

Atlanta, GA
800-467-9917
404-696-2339

Tifton, GA
800-848-1072
229-382-6788

Nashville, TN
866-808-7680
270-472-0782

Fulton, KY
800-326-7572
270-472-0782

Holly Hill, FL
800-342-1870
386-253-1660

Tampa, FL
800-282-3854
813-620-4228

Boynton Beach, FL
800-276-6399
561-588-1580

Wynne, AR
800-851-5905
870-238-3690

Memphis, TN
800-851-5905
901-937-5373

Jackson, MS
800-851-5905
601-932-1619

WE HOPE YOU WILL FIND THIS BROCHURE HELPFUL AND INFORMATIVE. IN NO WAY DOES IT REPRESENT OUR COMPLETE LINE OF PRODUCTS, BUT DOES GIVE THE CUSTOMER A GOOD OVERVIEW OF OUR TOP SELLING LINES AND PRODUCTS.

Table of Contents

2. Table of Contents
3. Prime Guard Oil
4. Prime Guard Transmission Fluid
5. Prime Guard Oil Filters
6. Top Filter Numbers/ Kendall Oil/ Rotella/ Delo
7. Motorcraft/Pennzoil/Castrol/Havoline/Quaker State/Valvoline/Exxon Mobil
8. Hydraulic Fluid/ Drain Plugs/ Freon/ Johnsen's Chemicals/ Power Service
9. Cutting Blades/ Coil Packs/ Wolf's Head/ Brake Fluid/ Power Steering Fluid/ Mystik Grease/ Gear Oil
10. Wiper Blades/ Windshield Washer Fluid/ Towels/ Jersey Gloves/ Sprayway/ Tuff Stuff
11. Sea Foam/ Lucas/ WD-40/ P.B. Blaster/ De-icer/ Fast Orange Hand Cleaner
12. Nviroclean/ Peak Antifreeze/ Oil Dry/ Big Wipes/ Diesel Exhaust Fluid



ALL LINES ARE NOT AVAILABLE IN ALL COMPANIES. SPECIAL ORDERS ARE AVAILABLE.

PREMIUM & FULL SYNTHETIC MOTOR OILS

PRIME GUARD



Prime Guard motor oils provide protection and performance equal to, or better than, the top national brands. Prime Guard motor oils meet or exceed performance requirements of car and light truck manufacturers for protection against:

Engine
Wear

Viscosity
Breakdown

Thermal
Breakdown

Volatility
Burn-Off

Engine
Deposits

Starting
Friction

PRIME GUARD



PREMIUM MOTOR OIL

PK

PGHD30	HD30 - QT (SN)	---	---	---	12
PG520**	5W20 - QT (SN-GF5)	---	---	---	12
PG530**	5W30 - QT (SN-GF5)	---	---	---	12
PG1030	10W30 - QT (SN-GF5)	---	---	---	12
PG1040	10W40 - QT (SN)	---	---	---	12
PG2050	20W50 - QT (SN)	---	---	---	12
PG5205Q**	5W20 - 5 QT (SN-GF5)	---	---	---	3
PG5305Q**	5W30 - 5 QT (SN-GF5)	---	---	---	3
PG10305Q	10W30 - 5 QT (SN-GF5)	---	---	---	3
PG10405Q	10W40 - 5 QT (SN)	---	---	---	3
PG20505Q	20W50 - 5 QT (SN)	---	---	---	3

HEAVY DUTY ENGINE OIL

PK

PG1540QT	15W40 - QT	---	---	---	12
PG1540GAL	15W40 - GAL	---	---	---	3

GEAR OIL

PK

PG80W90QT	80W90 - QT	---	---	---	6
PG80W90GAL	80W90 - GALLON	---	---	---	3
PG80W905GAL	80W90 - 5 GALLON	---	---	---	1
PG85W140QT	85W140 - QT	---	---	---	12
PG85W140GAL	85W140 - GALLON	---	---	---	3
PG85W1405GAL	85W140 - 5 GALLON	---	---	---	1



AUTOMATIC TRANSMISSION FLUID

	Low Visc. Full Synthetic Dex VI Premium ATF Part# PGATF	Multi-Vehicle ATF Part# PGMVATF	Full Synthetic ATF+4 Part# PGATF+4
GM DEXRON®-II (1973 - 1993)	✓	✓	✓
GM DEXRON®-III (1993 - 2005)	✓	✓	✓
GM DEXRON®-VI (2005 - Present)		✓	✓
Ford M2C-33F/M2C-33G Type F (1967 - 1987 est.)			
Ford MERCON® (1987 - 2004)	✓		✓
Ford MERCON® V (1995 - 2004)			✓
Ford MERCON® LV (2007 - Current)		✓	
Chrysler +3 (up to 2006)			✓
Chrysler +4 (2002 - Current)			✓
Honda TF-ZI		✓	✓
Nissan Matic-J		✓	✓
Toyota T-IV		✓	✓
Toyota WS		✓	✓

This chart is a general application guide. Always consult your owner's manual for the recommended fluid for your specific application.
* Pending Approval

Prime Guard Premium ATF Part# PGATF

For use where DEXRON®-III-MERCON® fluid is specified. This premium fluid is fully tested, and qualified as DEXRON®-III ATF fluid by General Motors and as MERCON® ATF fluid by Ford, and is suitable for use in automatic and powershift transmissions which specify the use of DEXRON® or MERCON® fluids. In addition, it is an approved Allison C-4 fluid and is qualified as a Caterpillar TO-2 lubricant. Outstanding oxidation stability, thermal stability and corrosion resistance insure long mileage component protection. The antiwear protection of this fluid also makes it ideal for exceeding the most demanding requirements of hydraulic pump manufacturers.

Specifications: DEXRON®-III (GM 6297-M), Caterpillar TO-2, MERCON® (Ford M2C185A), Sundstrand Hydrostatic Transmissions, Allison Type C-4, Ford M2C138CJ and Type H Fluids, Type A & Type A, Suffix A, DEXRON®, DEXRON®-II, DEXRON®-IIE. **Vehicle Applications:** General Motors, Ford (other than those calling for M2C33F or Type F Fluids), Chrysler, American Motors, Nissan, Honda, VW, Subaru, Mitsubishi, Isuzu, Toyota, Fiat, Audi, Alfa Romeo, Renault, Porsche, and Mercedes Benz. Do not use this product in General Motors vehicles after model year 2005 and Ford vehicles after model year 2006. Do not use this product in transmissions that specify Ford Type F, MERCON® V fluids or GM DEXRON®-VI fluid.

Prime Guard Full Synthetic GM Approved DEXRON®-VI Part# PGDEXVI

Prime Guard DEXRON®-VI Automatic Transmission Fluid is specially formulated with premium base stocks and advanced additive technology. This high-quality product meets the requirements of General Motors automatic transmissions calling for DEXRON®-VI fluid. This fluid is also suitable for use where DEXRON®-II, DEXRON®-III, JASO M315(1A), Toyota WS, or Toyota T-IV fluids are recommended.

Specifications: DEXRON®-II, DEXRON®-III, JASO M315(1A), MERCON®LV*, Toyota WS, or Toyota T-IV fluids

Vehicle Applications: General Motors Vehicles where DEXRON®-II, DEXRON®-III or DEXRON®-VI are recommended and some Ford and Toyota vehicles.

Premium ATF



PREMIUM ATF				PK
PGATF	DEX/MERC - QT.	----	----	12
PGATFGAL	DEX/MERC - GAL	----	----	3
PGATF5GAL	DEX/MERC - 5 GAL	----	----	1
PGMVATF	MULTI-VEHICLE - QT.	----	----	6
ATF FULL SYNTHETIC				
PGDEXVI	DEX VI - QT.	----	----	6
(MEETS DEXVI & TOYOTA WS/T-IV SPECS)				
PGATF+4	ATF+4 - QT.	----	----	6

Prime Guard Multi-Vehicle ATF Part# PGMVATF

Designed to meet requirements where DEXRON®-III, DEXRON®-VI, MERCON®, MERCON®V, ATF+3®, ATF+4®, and Allison C-4 fluids are specified. It also meets the automatic transmission fluid requirements of most import vehicles.

Specifications: DEXRON®-III, DEXRON®, DEXRON®-II, DEXRON®-IIE, MERCON®, MERCON®V, Type A, Type A-Suffix A, Allison C-4 (Not suitable where Type F fluid is specified).

Vehicle Applications: Most General Motors, Ford (except where Type F, M2C33F is specified), Chrysler, American Motors, Honda/Acura, Toyota, Mazda, KIA, Volvo, Nissan, VW/Audi, BMW, Hyundai, Mitsubishi, Mercedes Benz, Saturn, Subaru, Isuzu, Fiat, Alfa Romeo, Renault, Porsche and Jeep vehicles.


Prime Guard Full Synthetic ATF+4® Part# PGATF+4

Formulated specifically for automatic transmissions and transaxles used in Chrysler Corporation vehicles. It is formulated to supersede, and is fully compatible with, the Chrysler MS-7176® specification.

Specifications: ATF+4®, ATF+3®, ATF+2®, ATF+® (not suitable where DEXRON® or MERCON® fluids are specified)

Vehicle Applications: 1988 and Newer – All Chrysler, Plymouth and domestic Dodge models and all Jeep models without AW-4 automatic transmissions, 1989 and Newer – All import models from Dodge, Eagle and Plymouth, 1993 and Newer – All domestic Eagle models, 1987-1995 Hyundai automatic transaxles and some Mitsubishi automatic transmissions.

The Quality Components of a Prime Guard Oil Filter

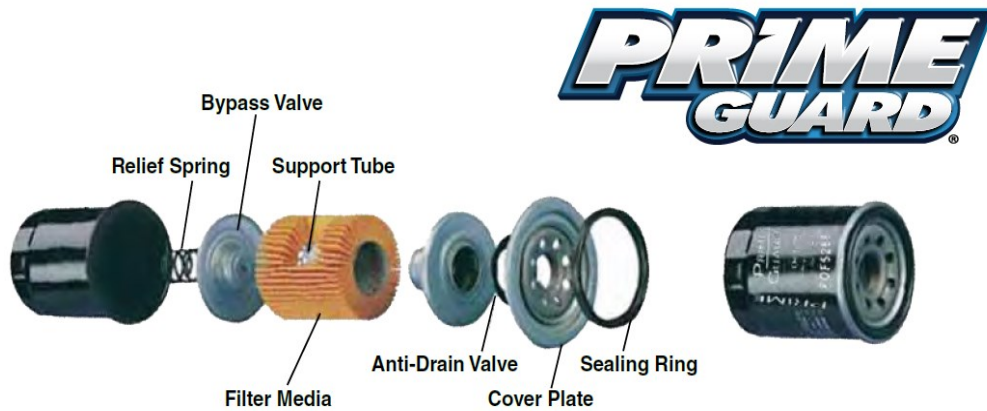

Prime Guard Filter Warranty

Prime Guard filters are warranted against manufacturer defects in workmanship, design and materials. Use of Prime Guard filters will not void new car warranties.

Why Should You Use Prime Guard Oil Filters?

• LEAK TESTED

All filters are individually leak tested and date stamped on top of the filter to insure quality.

• END CAP / BASE PLATE

Plastisol sealant used in all filter end caps to prevent leakage. Sealant is applied in a automated process to guarantee consistent application and performance.

• SEALING GASKET

Nitrile sealing gasket is used on all filters to securely seat the filter to the engine block to prevent any leakage.

• FILTER MEDIA

All filter media is designed for the highest filtration efficiency and to withstand any pressure surges or collapsing.

• BASE PLATE

Heavy-Gauge steel plate for maximum strength. Rolled thread design prevents any metal particles from entering filter during manufacturing process.

• FILTER INBOARD SEAM

Double lock seam prevents any leakage between the threaded base plate and filter can.

• SPIRAL CENTER TUBE

Tin plated steel is used for maximum flow and structural strength.

• RELIEF-SAFETY VALVE

Designed to by-pass oil flow if media element were to be blocked.

• COIL SPRING

Steel tension spring holds filter element against the cartridge to prevent leaks and maintain the filter cartridge in place.

• ANTI-DRAIN BACK VALVE

The nitrile seal check valve prevents any reverse draining of filter from engine when required by O.E. specs.

• FILTER HOUSING

All filters are 0.5mm or more in thickness to withstand any excessive pressure build up. Outside filter paint process prevents rust and corrosion.



Manufactured by a QS9000 / ISO9001 / TS16949 Certified Manufacturing Company - All Prime Guard Filters Meet or Exceed OEM Specifications



PRIME GUARD® OIL FILTERS



TOP SELLERS

POF111
POF195
POF2222
POF241

POF2500
POF4006
POF4011
POF4476

POF4612
POF4631
POF4651
POF5274

POF5288
POF5436
POF5608
POF5839

POF6135
POF6296
POF6311



Kendall®

1057232	GT-1 Full Syn 5w30
1057228	GT-1 Full Syn 5w20
1057222	GT-1 Full Syn 0w20
1057246	GT-1 Syn Blend 10w30
1057225	GT-1 Full Syn 10w30
1057251	GT-1 Syn Blend 5w20
1057254	GT-1 SYN BLEND 5W/30
1060949	GT1 DEXOS1 5W30 12/1

1057267	GT-1 H.P. 20w50
1057234	GT-1 High Mileage 10w30
1057273	KENDALL GT-1 HP 50W
1057239	GT-1 High Mileage 5w30
1074931	Super D XA (ti) 15w40
1057242	GT-1 High Mileage 5w20
1056017	Super D XA (ti) 15w40
1043073	GT1 HP NITRO 70



ROTELLA® T

550045120	ROTELLA 15W40 GAL PK3
5071356	15W40 ROTELLA OIL-QT

Delo®

DELO1540	DELO 15W40
----------	------------



MC520	MOTORCRAFT 5W20 QT
MC530	MOTORCRAFT 5W30 QT
MC1030	MOTORCRAFT 10W30 QT
MERCONV	TRANSMISSION FLUID
SD1030	MOTORCRAFT SD10W30 1
MC1040	MOTORCRAFT 10W40 QT



PZ530	5W30 MOTOR OIL-QT
PZ1030	10W30 MOTOR OIL-QT
PZ520	PENNZOIL 5W20 QT
PZ1040	10W40 MOTOR OIL-QT



6144	CASTROL GTX 5W30
6145	CASTROL GTX 10W30
6147	CASTROL GTX 20W50
6140	CASTROL GTX 5W20
6146	CASTROL GTX 10W40



HAV530	HAVOLINE 5W30 QT
HAV1030	HAVOLINE 10W30 QT



QS1030	QUAKER STATE 10W30
QS530	QUAKER STATE 5W30



VV129	10W30 MOTOR OIL-QT
VV177	5W30 MOTOR OIL-QT

94001M	MOBIL 1 5W30 QT SYN
27037	CLEAN 5000 5W30 QT
97735	EXXON OIL 5W30QT
96995	MOBIL 1 0W20 QT
96989	MOBIL 1 0W40 QT
94003M	MOBIL 1 10W30 QT





SUR3605	TRAC HYD 303 - 5 GAL
---------	----------------------



SUS40	AW68 HYDRAULIC OIL 5 GAL
-------	--------------------------



DP7702	OIL DRAIN PLUG
DP7725	OIL DRAIN PLUG

REFRIGERANT



R134A12	R134A 12OZ CAN
R134A30	R134A 30LB CYL.



2413	14 OZ BRAKE CLEANER
4642NC	CARB CLEANER 16.25 OZ
6752	STARTING FLUID 10.7 OZ
2212	DOT 3 BRAKE FLUID 12 OZ
2232	DOT 3 BRAKE FLUID 32 OZ
2234	DOT 3 BRAKE FLUID 1 GAL



1025P	DIESEL FUEL SUPPLEMENT
-------	------------------------



14COW	14" CHOPSAW BLADE
-------	-------------------



COP8	FORD IGNITION COIL
COP9	FORD IGNITION COIL



UNIVERSAL
SYNTHETIC ATF QT
USATF32



PSF12	POWER STEERING FLUID 12OZ
PSF32	POWER STEERING FLUID 32OZ
PSF128	POWER STEERING FLUID 1 GAL



54385	JT-6 HI-TEMP (RED) 14 OZ
52285	GEN.PURPOSE GREASE 14 OZ
54845	JT-6 MP #2 (GREEN) 14 OZ



DW4808	6" BLADE 14 TPI
DW4809	8" BLADE 14 TPI



DWA4186	2X LONG LIFE 6" BLADE
DWA4188	2X LONG LIFE 8" BLADE



35967	6" 14TPI RECIP SAW BLADE
35967-8	8" 18TPI RECIP SAW BLADE
35967-9	9" 14TPI RECIP SAW BLADE

Superior Chemistry. Superior Performance.



MAG120	DOT 3 BRAKE FLUID QT
MAG906	ATF DEX/MERC GAL



SUS17	90W GEAR OIL QT
SUS217	SYN. GL5 75W90 QT
SUS216	SYN. GL5 75W140 QT



WIPER BLADES



SUPER S
WINDSHIELD WASHER
CONCENTRATE 12OZ
SUS112



SUPER CONCENTRATE
WINDSHIELD WASH
KIN16
MAKES 165 GALLONS!



14001	JERSEY GLOVES
16001	JERSEY GLOVES(FLANNEL)



75190	BLUE SHOP TOWELS
75130	ROLL SHOP TOWELS



SW50	SPRAYWAY GLASS CLEANER
SW936	INSTANT SHINE 11OZ



350	TUFF STUFF AEROSOL
-----	--------------------



SF16 SEAFOAM



DC14 SEAFOAM DEEP CREEP



10020L LUCAS CYLINDER CLEANER



10001L LUCAS OIL STABILIZER QT.



110078W WD40 11OZ



16PB P.B. BLASTER



DE1 DE-ICER 12OZ



25219 FAST ORANGE SOAP 1 GAL



Part# BG020

- Non-toxic, non-carcinogenic, all-natural
- Reusable up to 5 times
- Lightweight
- 26 lbs. Nviroclean = 312 lbs. clay products
- Safe to use around food and beverages



**BAG CONTAINS
1.5 CUBIC FEET**



PKDEX	FULL FORCE LONGLIFE
PKGR	ALL WEATHER "GREEN"
PKUN	FULL FORCE UNIVERSAL



OIL DRY

7941 SAFTSORB 40 LB BAG



BIG WIPES[®]

60020046	BIG WIPES HD TEXTURED RED TOP
60020048	BIG WIPES HD WIPES 80CT BLACK TOP



**VICTORY
BLUE**

DEF EXHAUST FLUID

DEF250G 2.5 GALLONS